


525  
TOE OF LOCO LONG.

375 FOR ACMT  
316 FOR AC DC


EARTHING SWITCH  
DGS NO. E.L.E. (R&L)  
BENI LTB.

FIXING ARRST OF  
EARTHING SWITCH  
REFER. ORG. NO  
05/1,47,87.




THICK POLYESTER REINFORCED  
WITH FIBRE GLASS


VIEW ARROW X

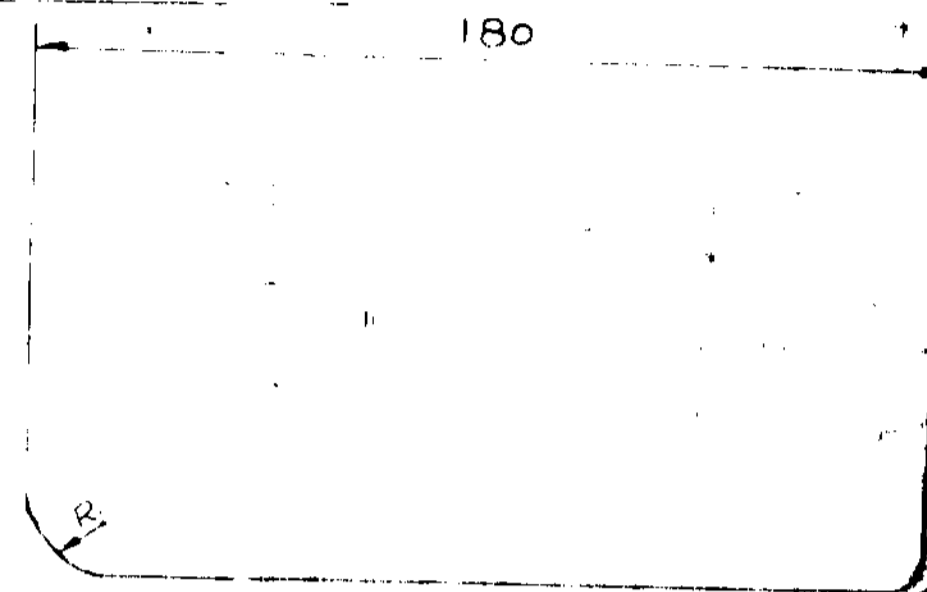

VIEW IN DIRECTION OF ARROW Y



SECTION-B-B

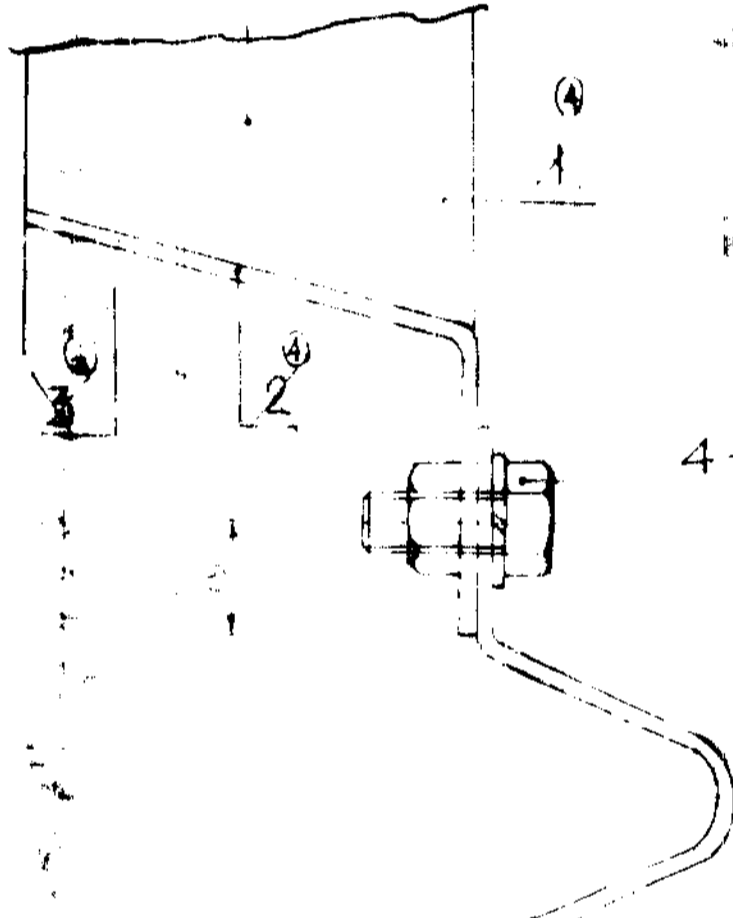

4-1-6

DETAIL-1

1. ALL THE ITEMS SHOULD BE SUPPLIED BY THE MANUFACTURER...  
2. THE RATIO OF RESIN TO CHOPPED FIBRE SHALL BE...  
3. THE SUPPLIER SHALL GIVE A CERTIFICATE...  
4. THE MANUFACTURER SHALL ENGRAVE, EMBLEM, PRINT, STENCIL...  
PERMANENT IDENTIFICATION MARK INDICATING...  
THEIR NAME/MONOGRAM/BRAND NAME AND... THE...  
MONTH AND YEAR OF MANUFACTURE AT A CONSPICUOUS...  
PLACE.

ASSY C&D... P355/001  
ASSY C&D... P355/001  
ASSY C&D... P355/001

