


11	DY. CEE D-1	Base Plate thickness is 16 mm.	
ALIGN	AUTHY	DESCRIPTION	SIGN.

Technical drawing of a mechanical assembly showing a cross-section of a shaft and housing. The shaft has a central hole and a smaller hole at the top. The housing has a large circular opening and a smaller one at the bottom. Dimensions are given in inches and millimeters.

S ME (D)	NOTE	REVISED
SME (D)	NOTE 2 ADDED C M L X Y VIEW ADDED	56 / D R S 28.9
SME (B)	W M CLASS OF LOGS ADDED	
SME (D)	WCM/ ADDED	5d / V M G 14.7 / O
S ME (D)	NOTE 3 ADDED & NOTE 3A ADDED	100-21-100

(38.9) (61.9) (31.8) (69.85) 23.0 ± 0.005 (69.85) 18 1/2" (464.9)

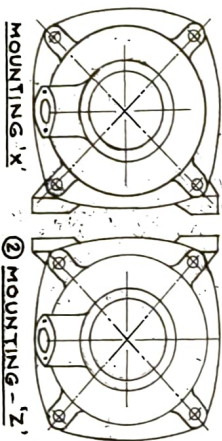

1. ~~CONNECTIONS~~ ~~SHOULD~~ ~~BE~~ ~~PROVIDED~~ ~~AT~~ ~~THE~~ ~~TIME~~ ~~OF~~ ~~INSTALLATION~~ ~~AND~~ ~~TESTING~~ ~~THE~~ ~~CAPS~~ ~~SHOULD~~ ~~BE~~ ~~THE~~ ~~SIZE~~ ~~OF~~ ~~8~~ ~~BY~~ ~~11~~ ~~INCH~~ ~~HEADS~~ ~~MARKED~~ ~~ON~~ ~~THEM~~
2. ~~FOR~~ ~~WCS,~~ ~~DC~~ ~~LNOS~~ ~~E~~ ~~WALY,~~ ~~ACNI~~ ~~LNOS~~ ~~REQUIREMENT~~ ~~OF~~ ~~GRADE~~ ~~CYLINDERS~~ ~~IS~~ ~~OF~~ ~~TYPE~~ ~~MOUNTING,~~ ~~"X",~~ ~~4~~ ~~LNOS~~ ~~PER~~ ~~DCO~~ ~~E'~~ ~~MOUNTING,~~ ~~"Z",~~ ~~4~~ ~~LNOS~~ ~~PER~~ ~~DCO~~
3. ~~THE~~ ~~FERRULES~~ ~~CASTINGS~~ ~~TO~~ ~~BE~~ ~~CLEANED~~ ~~PROPERLY~~ ~~AND~~ ~~GIVEN~~ ~~PACOLUBRIE~~ ~~TREATMENT~~ ~~AFTER~~ ~~MACHINING~~ ~~AS~~ ~~PER~~ ~~R.D.S.'S~~ ~~SPECN.~~
4. ~~PLASTIC~~ ~~CAPS~~ ~~TO~~ ~~BE~~ ~~PROVIDED~~ ~~AT~~ ~~THE~~ ~~TIME~~ ~~OF~~ ~~CONNECTIONS~~ ~~AFTER~~ ~~INSPECTION~~ ~~E~~ ~~TESTING~~ ~~THE~~ ~~CAPS~~ ~~SHOULD~~ ~~BE~~ ~~THE~~ ~~SIZE~~ ~~OF~~ ~~8~~ ~~BY~~ ~~11~~ ~~INCH~~ ~~HEADS~~ ~~MARKED~~ ~~ON~~ ~~THEM~~
5. ~~ALL~~ ~~SUBMER~~ ~~COMPONENTS~~ ~~SHOULD~~ ~~CONFORM~~ ~~TO~~ ~~RUBBER~~ ~~SPECN.~~ ~~NO~~ ~~125-38~~ ~~AS~~ ~~WALCO'S~~ ~~RUBBER~~ ~~SPECN.~~ ~~AND~~ ~~SUPPLY~~ ~~OF~~ ~~THE~~ ~~RUBBER~~ ~~COMPONENTS~~ ~~SHOULD~~ ~~BE~~ ~~FROM~~ ~~R.D.S.'S~~ ~~APPROVED~~ ~~SOURCES.~~

UC-132