

PREPARED BY-

13.10.23

SSE/Dry
(ABU WASEP)

2. CHECKED BY - 17 Sham



14/10/23
B. K. L.
SS 171613

27 Dec

SECTION - A-A'

NOTES:-

1. JIG & FIXTURES TO BE USED TO MAINTAIN
THE GEOMETRY OF THE ASSLY. & HOLES ETC.
2. ALL HOLES ARE TO BE WITHIN 0.5 mm
OF THEIR TRUE POSITION.
3. SURFACE, COATING TO BE DONE WITH
STONE GREY, COLOUR.
4. FOR OTHER TECH. DETAIL. REFER TECH.
SPECN. NO. CLW/MS/3/077.

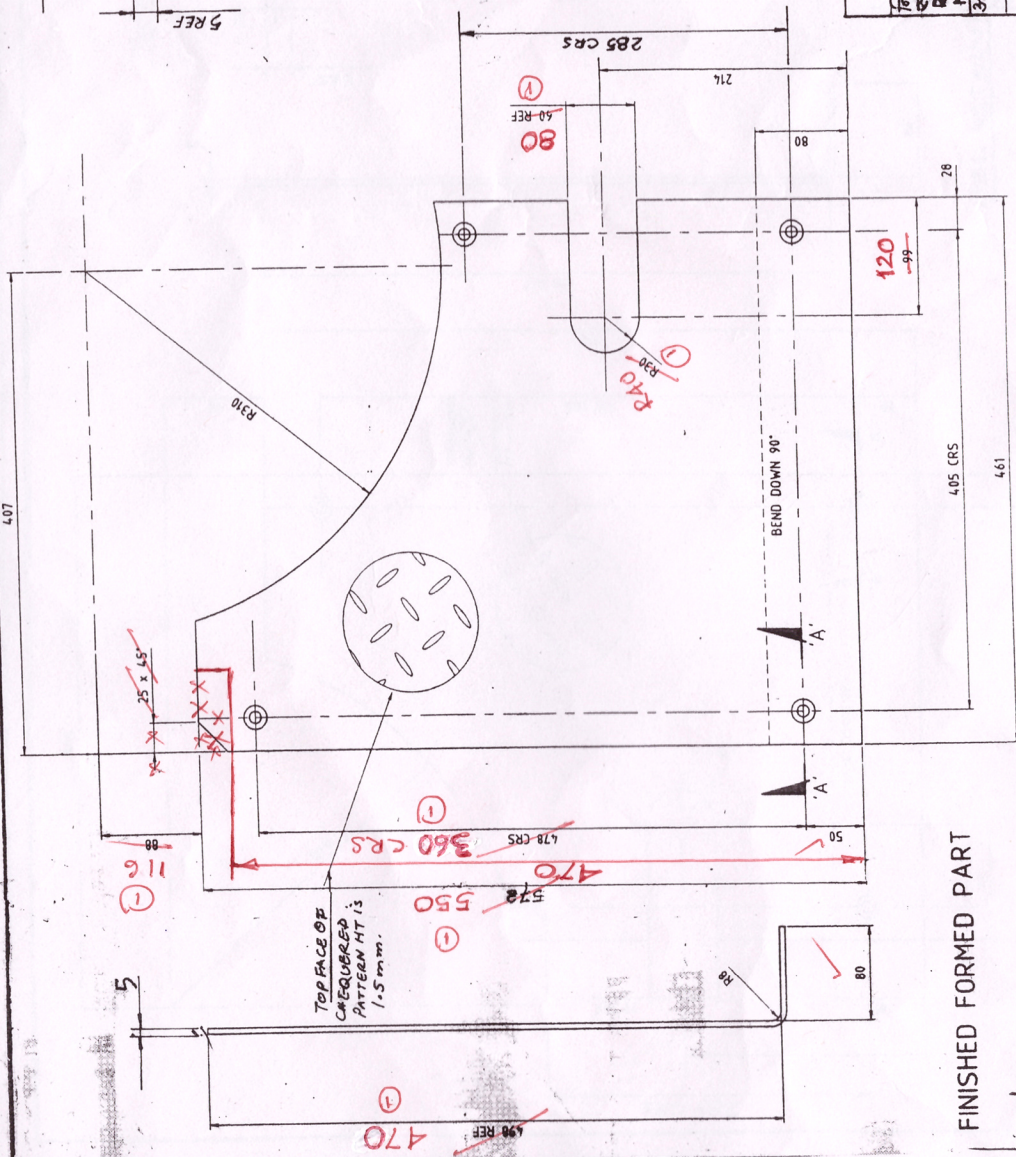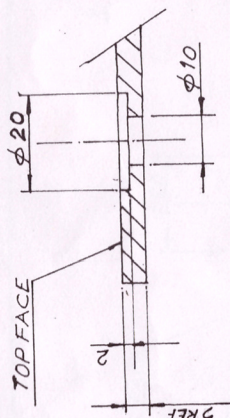

FINISHED FORMED PART

DEVELOPMENT DETAIL

C&D NO. T326/006

1 STEEL 1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2
1 STEEL 1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2
1 STEEL 1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2
1 STEEL 1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2	1513502 TYPE - 1A 8-2

[illegible]

①	BY CEE D-III	A98, 578, 478 (RS), P8, R30, 99, 60 TO 470, 550, 360 (RS) 116, 40, 120, 80,	DATE PAGE NO. INITIAL
---	--------------------	--	-----------------------------

PROFILE MODIFIED
ADDED DIMENSIONS
470. ALTERED DIMN
498, 578, 478 CRS,
P8, R30, 99, 60 TO
470, 530, 360 CRS
116, R40, 120, 80,

①

NM2-CHDD / RED WORK- DT 13.10.2023