
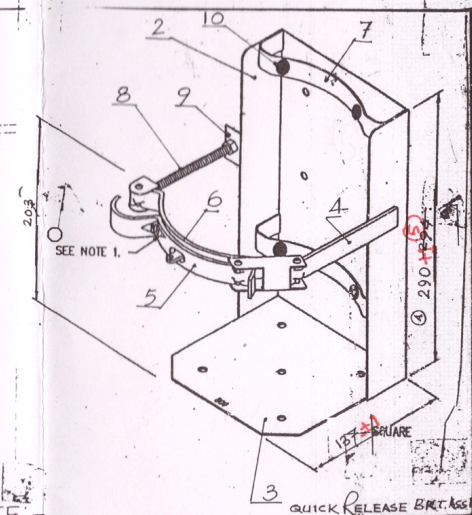


WALL THICKNESS 3.5 TO 4 mm

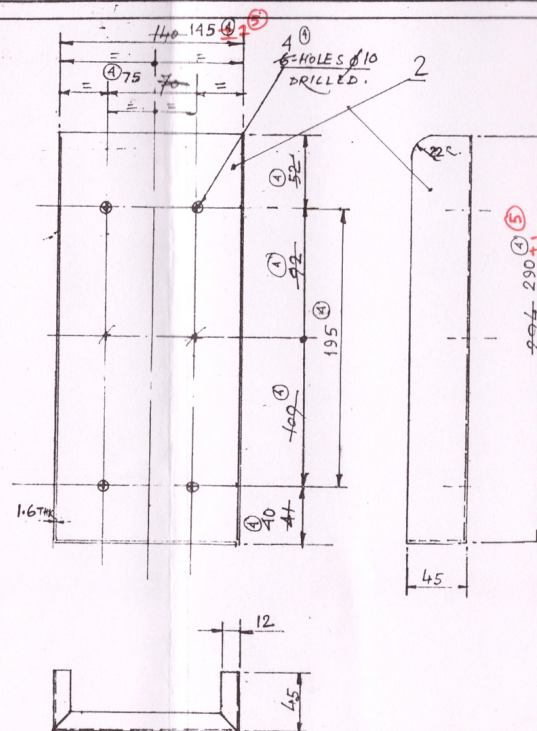

NOTE

1. STAMP ON OUTSIDE STRAP (FIRM'S NAME)
2. BACKET ASSLY TO BE E COATED WITH BLACK PAINTS
3. PAINTED BRACKETS MUST WITHSTAND 240 HOUR SALT SPRAY TEST AS PER ASTM B-117 WITHOUT CORROSION.
4. FIX RUBBER GROMMETS (KEF-10) AFTER PAINTING.
- ⑤ 5. FIRE EXTINGUISHER WITH BRACKET ASSLY AS A UNIT TO BE SUPPLIED ACCORDING TO THE SIZE OF EXTINGUISHER.
6. FOR TECHNICAL DETAIL REFER TECH. SPECN NO. CLW/MS/3/016

10	RUBBER GROMMET	28	NEOPRENE RUBBER	
9	HOLDING PLATE	24	STEEL	15:1079 Gr. B
8	THREADED ROD ASSLY.	42	-	HR2
7	CUSHION	84	STEEL	15:1079 Gr. B
6	STRAP INNER	24	"	HR2
5	STRAP OUTER ASSLY	24	"	
4	BRACKET ARM	24	"	
3	MOUNTING BASE	24	STEEL	
2	MOUNTING BRACKET VERTICAL (BACK)	24	STEEL	15:1079 Gr. B
1	FIRE EXTINGUISHER C02 TYPE	24	SEE NOTE	15:2074
-	FIRE EXTINGUISHER C MOUNTING	24	-	15:2074

[illegible]

1ST ANGLE PROJECTION

WAG/PS (DR. BO)

WAG/3 WAP

1209-13-240-02

[illegible]